


F series

Rated current: F-9X14 225A



Model	F9×14/5	F9×14/7	F9×14/10
Order number	5015.025	5015.026	5015.027
Length	75mm	75mm	106mm
Pitch	62mm	62mm	93mm

E series



Bus electroplating, electroless plating can be arbitrarily divided the length of 1 m C-HLn (n for the standard length, unit: m).

- ① If the length of busbar made of brass is 1m, it is possible to be randomly cut.
- ② Busbar 8×12.
- ③ It's possible to be cut if there protection overed and its length is 1000mm.
- ④ Support shelf: made from nylon 6.6, the type is E/G.

Rated current: E-6X8 72A

E-8X12 135A

Article support



E/H 8×12




E/H 6×8



Model	E-6×8/5	E-6×8/10	E-6×8/15	E-8×12/5	E-8×12/10	E-8×12/15
Order number	5015.019	5015.020	5015.021	5015.022	5015.023	5015.024
Length	73.5mm	114mm	177mm	91mm	140mm	196mm
Pitch	63mm	104mm	145mm	81mm	130mm	186mm

H series

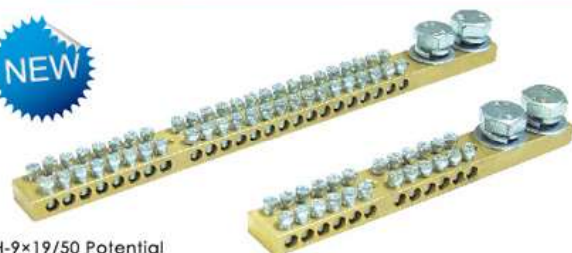


H-9×19/50 Potential

H-9×19/26 Potential

Technical data

Model	H-9 × 19/26	H-9 × 19/50
Length	144mm	230mm
Pitch	48mm	120mm



G series



G-8×12/12 Potential
G-8×12/10 Potential
G-8×12/8 Potential
G-8×12/6 Potential
G-8×12/4 Potential

G-8×12 copper rows in insulating crust with earthing in one end.