


### PVC Coated Flexible Steel Conduit ( PG standard )



Cat No.	Inch Size	Inside Diameter(mm)		Outside Diameter over jacket(mm)		Bending Radius(mm)	Length of Roll Meter
		Min	Max	Min	Max		
JSH-PG7	PG7	9.20	9.50	13.10	13.40	36	100
JSH-PG9	PG9	10.60	10.90	14.70	15.00	40	100
JSH-PG11	PG11	13.60	13.90	17.40	17.70	43	100
JSH-PG13	PG13	15.60	15.90	20.20	20.50	45	100
JSH-PG16	PG16	17.30	17.60	22.20	22.50	50	50
JSH-PG21	PG21	22.70	23.10	28.00	28.40	55	50
JSH-PG29	PG29	30.80	31.20	36.40	37.00	64	30
JSH-PG36	PG36	39.50	39.90	46.80	47.50	95	30
JSH-PG48	PG48	51.00	51.50	58.60	59.60	110	20

### Low Smoke Halogen Free Flexible Steel Conduit

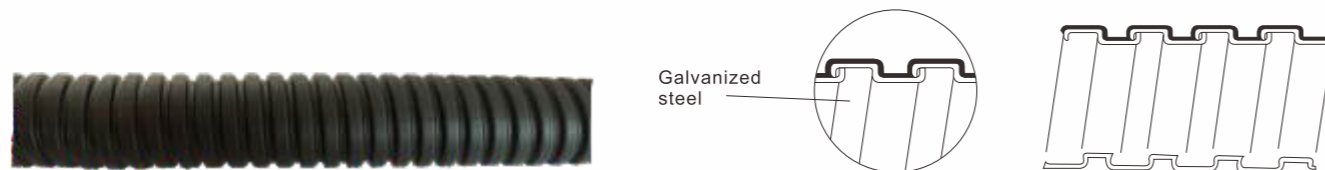

#### Description:

Galvanized steel/stainless steel 201/301/304 core, low smoke zero halogen materials jacked  
 Low smoke, flame-retardant, UV resistant, anti-aging, high flexibility and liquid-tightness, good tensile stress.  
 -20°C~+100°C, can get +120°C in a short time  
 Application area: protect cable and wire on transportation system engineering/auto-control equipment/ transmission and distribution system/communication system/ship/mansion/plant/outdoors

Cat No.	Inch Size	Inside Diameter(mm)		Outside Diameter over jacket(mm)	Bending Radius(mm)	Length of Roll Meter
		Min	Max			
JSF-010	10mm	6.80		10.00	25	100
JSF-012	12mm	10.30		14.00	30	100
JSF-016	16mm	13.00		17.00	35	100
JSF-020	20mm	16.90		21.50	45	50
JSF-025	25mm	21.40		26.00	55	50
JSF-032	32mm	28.10		34.00	60	30
JSF-040	40mm	37.70		44.50	80	30
JSF-050	50mm	48.40		55.00	90	20
JSF-063	63mm	57.50		64.50	115	10
JSF-075	75mm	75.00		79.00	150	10

### Liquid Tight Flexible Steel Conduit



#### Description:

Galvanized steel core, PVC jacketed  
 Excellent waterproof, high flexibility, good insulativity, crushing resistance, waterproof, corrosion resistant, sunlight resistant  
 Temperature range from -10°C~+70°C, -20°C~+90°C, -20°C~+105°C, -40°C~+120°C  
 Application area: protect cable and wire on transportation system engineering/auto-control equipment/ transmission and distribution system/communication system/ship/mansion/plant/outdoors

Cat No.	Inch Size	Inside Diameter(mm)		Outside Diameter over jacket(mm)		Bending Radius(mm)	Length of Roll Meter
		Min	Max	Min	Max		
JSB-014	1/4"	6.20	6.70	11.40	11.90	35	50
JSB-038	3/8"	12.30	12.80	17.50	18.00	60	50
JSB-050	1/2"	15.80	16.30	20.80	21.30	85	50
JSB-075	3/4"	20.70	21.20	26.30	26.70	100	30
JSB-100	1"	26.20	26.80	32.70	33.40	150	30
JSB-125	1-1/4"	34.80	35.40	41.40	42.20	180	20
JSB-150	1-1/2"	40.10	40.60	47.40	48.30	220	20
JSB-200	2"	51.30	51.90	59.40	60.30	250	15
JSB-250	2-1/2"	63.00	63.60	72.10	73.00	300	10
JSB-300	3"	78.00	78.70	87.90	88.90	450	10
JSB-400	4"	101.60	102.60	113.20	114.30	600	5

### American Standard Flexible Steel Conduit



#### Description:

Galvanized steel/ Aluminum  
 Excellent flexibility, crushing resistance  
 Application area: protect cable and wire on transportation system engineering/auto-control equipment/ transmission and distribution system/communication system/ship/mansion/plant/outdoors

Cat No.	Trade Size	Acceptable Internal Diameter		Acceptable External Diameter		Bending Radius(mm)	Length of Roll Meter
		Min	Max	Min	Max		
JSU1-038	3/8"	9.50		15.60		51	100
JSU1-050	1/2"	15.80		23.40		76	100
JSU1-075	3/4"	20.60		28.10		101	100
JSU1-100	1"	25.40		35.10		127	100
JSU1-125	1-1/4"	31.80		41.40		165	50
JSU1-150	1-1/2"	38.10		49.53		190	50
JSU1-200	2"	50.80		62.23		254	50
JSU1-250	2-1/2"	63.50		77.72		318	25
JSU1-300	3"	76.20		90.42		381	25
JSU1-400	4"	101.60		115.82		508	25