


FKL6622



Certification	Material	Retardent Rating	IP rating
CE UL RoHS	ABS	UL94-V2	IP54




Available colors: RAL7035 RAL7032

Fans and filters FKL 6622....	Fans and filters FKL 6622.230	Exit filter FKL 6622.300	Drawing FKL 6622....

Technical data


Model	FKL6622.230	FKL6622.115	FKL6622.024
Available colors	RAL7032/RAL7035	RAL7032/RAL7035	RAL7032/RAL7035
Order number	2013.005/2013.026	2013.006/2013.027	2013.007/2013.028
Standard fan	F2E-120S-230	F2E-120S-115	SP1203824H
Rated voltage (V / Hz)	230/50/60	115/50/60	24(DC)
Air flow, free blowing	55/66m³/h		
Air flow With export filters	1xFKL6622.300:43/50m³/h 2xFKL6622.300:48/55m³/h		
Axial Fan	Automatically shield pole motor		DC Motor
Rated current (A)	0.12/0.10	0.24/0.23	0.30
Power (W)	19/14	18/15	3.5
Noise level (dB)	43/50		
Operating temperature range	-10°C to +55°C		
Exit filter	FKL6622.300 RAL7032(2013.008)/RAL7035(2013.029)		
Remarks	Special voltage needs can call the inquiry of the Company		

Performance FKL 6622....

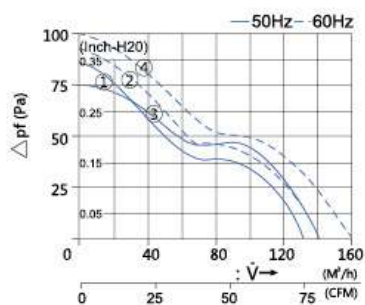




FKL6623

Certification	Material	Retardent Rating	IP rating
CE UL RoHS	ABS	UL94-V2	IP54




Available colors: RAL7035 RAL7032

Fans and filters FKL 6623....	Fans and filters FKL 6623.230	Exit filter FKL 6623.300	Drawing FKL 6623....
----------------------------------	----------------------------------	-----------------------------	-------------------------




Performance FKL 6623....

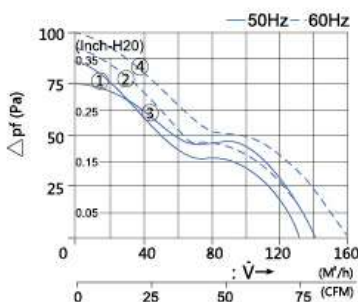

Technical data

Model	FKL6623.230	FKL6623.115	FKL6623.024
Available colors	RAL7032/RAL7035	RAL7032/RAL7035	RAL7032/RAL7035
Order number	2013.009/2013.030	2013.010/2013.031	2013.011/2013.032
Standard fan	F2E-120S-230	F2E-120S-115	SP1203824H
Rated voltage (V / Hz)	230/50/60	115/50/60	24(DC)
Air flow, free blowing	105/120m³/h		
Air flow With export filters	1xFKL6623.300:71/82m³/h 2xFKL6623.300:85/98m³/h		
Axial Fan	Automatically shield pole motor		DC Motor
Rated current (A)	0.12/0.10	0.24/0.23	0.30
Power (W)	19/14	18/15	3.5
Noise level (dB)	43/50		
Operating temperature range	-10°C to +55°C		
Exit filter	FKL6623.300 RAL7032(2013.012)/RAL7035(2013.033)		
Remarks	Special voltage needs can call the inquiry of the Company		

FKL6625






Certification	Material	Retardent Rating	IP rating
CE UL RoHS	ABS	UL94-V2	IP54



Available colors: RAL7035
 RAL7032


Fans and filters FKL 6625....	Fans and filters FKL 6625.230	Exit filter FKL 6625.300	Drawing FKL 6625....
----------------------------------	----------------------------------	-----------------------------	-------------------------




Technical data

Model	FKL6625.230	FKL6625.115	FKL6625.024
Available colors	RAL7032/RAL7035	RAL7032/RAL7035	RAL7032/RAL7035
Order number	2013.034/2013.013	2013.035/2013.014	2013.036/2013.015
Standard fan	F2E-162B-230	F2E-162B-115	FP-108CX-SI-BW
Rated voltage (V / Hz)	230/50/60	115/50/60	24(DC)
Air flow, free blowing	230/265m³/h		
Air flow With export filters	1xFKL6625.300:170/205m³/h 2xFKL6625.300:200/230m³/h		
Axial Fan	Automatically shield pole motor		DC Motor
Rated current (A)	0.26/0.20	0.51/0.42	0.46
Power (W)	37/33	40/35	14
Noise level (dB)	48/52		
Operating temperature range	-10°C to +55°C		
Exit filter	FKL6625.300 RAL7032(2013.037)/RAL7035(2013.016)		
Remarks	Special voltage needs can call the inquiry of the Company		

Performance FKL 6625....

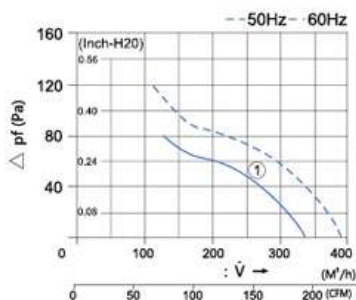

FKL6626





Certification	Material	Retardent Rating	IP rating
CE UL RoHS	ABS	UL94-V2	IP54




Available colors: RAL7035
RAL7032

Fans and filters FKL 6626....	Fans and filters FKL 6626.230	Exit filter FKL 6626.300	Drawing FKL 6626....
----------------------------------	----------------------------------	-----------------------------	-------------------------




Performance FKL 6626....

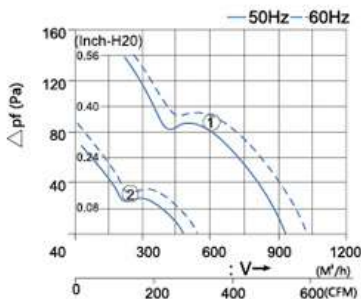

Technical data

Model	FKL6626.230	FKL6626.115
Available colors	RAL7032/RAL7035	RAL7032/RAL7035
Order number	2013.038/2013.017	2013.039/2013.018
Standard fan	F2E-260B-230	F2E-260B-115
Rated voltage (V / Hz)	230/50/60	115/50/60
Air flow, free blowing	500/560m³/h	
Air flow With export filters	1xFKL6626.300:360/390m³/h 2xFKL6626.300:440/495m³/h	
Axial Fan	Electric capacitance	
Rated current (A)	0.29/0.33	0.61/0.63
Power (W)	65/77	61/71
Noise level (dB)	62/64	
Operating temperature range	-10°C to +55°C	
Exit filter	FKL6626.300 RAL7032(2013.040)/RAL7035(2013.019)	
Remarks	Special voltage needs can call the inquiry of the Company	

FKL6626-D






Certification	Material	Retardent Rating	IP rating
CE UL RoHS	ABS	UL94-V2	IP54



Available colors: RAL7035
RAL7032

Fans and filters FKL 6626....	Fans and filters FKL 6626.230-D	Exit filter FKL 6626.300	Drawing FKL 6626....
----------------------------------	------------------------------------	-----------------------------	-------------------------



Technical data

Model	FKL6626.230-D	FKL6626.115-D
Available colors	RAL7032/RAL7035	RAL7032/RAL7035
Order number	2013.041/2013.020	2013.042/2013.021
Standard fan	F2E-320B-230	F2E-320B-115
Rated voltage (V / Hz)	230/50/60	115/50/60
Air flow, free blowing	1200/1350m ³ /h	
Air flow With export filters	1xFKL6626.300:769/890m ³ /h 2xFKL6626.300:910/1000m ³ /h	
Axial Fan	electric capacitance	
Rated current (A)	0.47/0.59	0.62/0.65
Power (W)	104/135	60/70
Noise level (dB)	68/70	
Operating temperature range	-10°C to +55°C	
Exit filter	FKL6626.300 RAL7032(2013.040)/RAL7035(2013.019)	
Remarks	Special voltage needs can call the inquiry of the Company	

Performance FKL 6626....

